


MICROMOTORS

Compact and high-performance micromotor, delivering reliable bidirectional operation up to 330 bar. Ideal for precision applications in demanding environments with limited space.

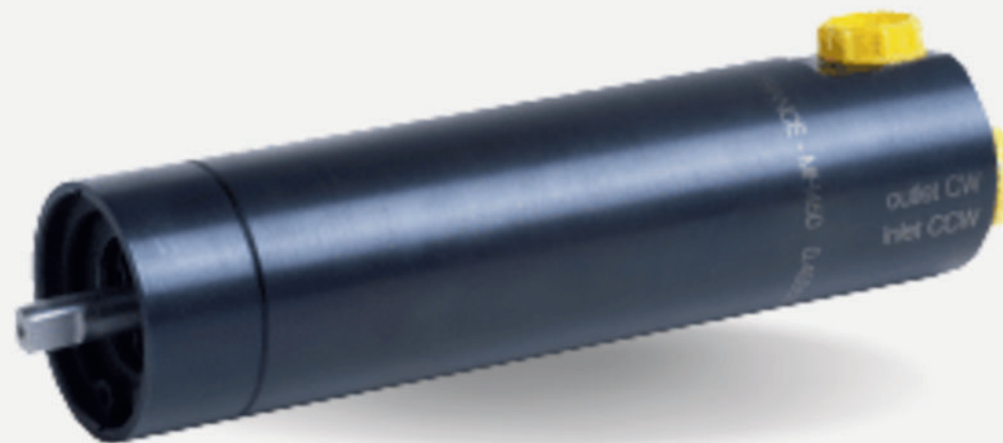

Technical data

The MH450DS micromotor is capable of operating in both directions of rotation (clockwise and counter-clockwise). Available in a displacement of 463mm³, its maximum pressure is 330 bar continuous and 400 bar peak, and this in a compact size (length 119 mm).

Characteristics and advantages :

- Maximum operating temperature: 150°C and 175°C allowed at 5% of the time at peak,
- Type of fluid supported; hydraulic mineral oils (consult us for other fluids),
- Weight: 0.7 kg.

Fields of application :

Drilling system for mineral wells (sampling and analysis).



Product catalogue
➤ Open



Product webpage
➤ Open