


XPi SERIES

Fixed displacement pumps

The XPi pump range combines compact design, high-pressure capability, and installation flexibility, ensuring reliable performance in the most demanding truck applications.

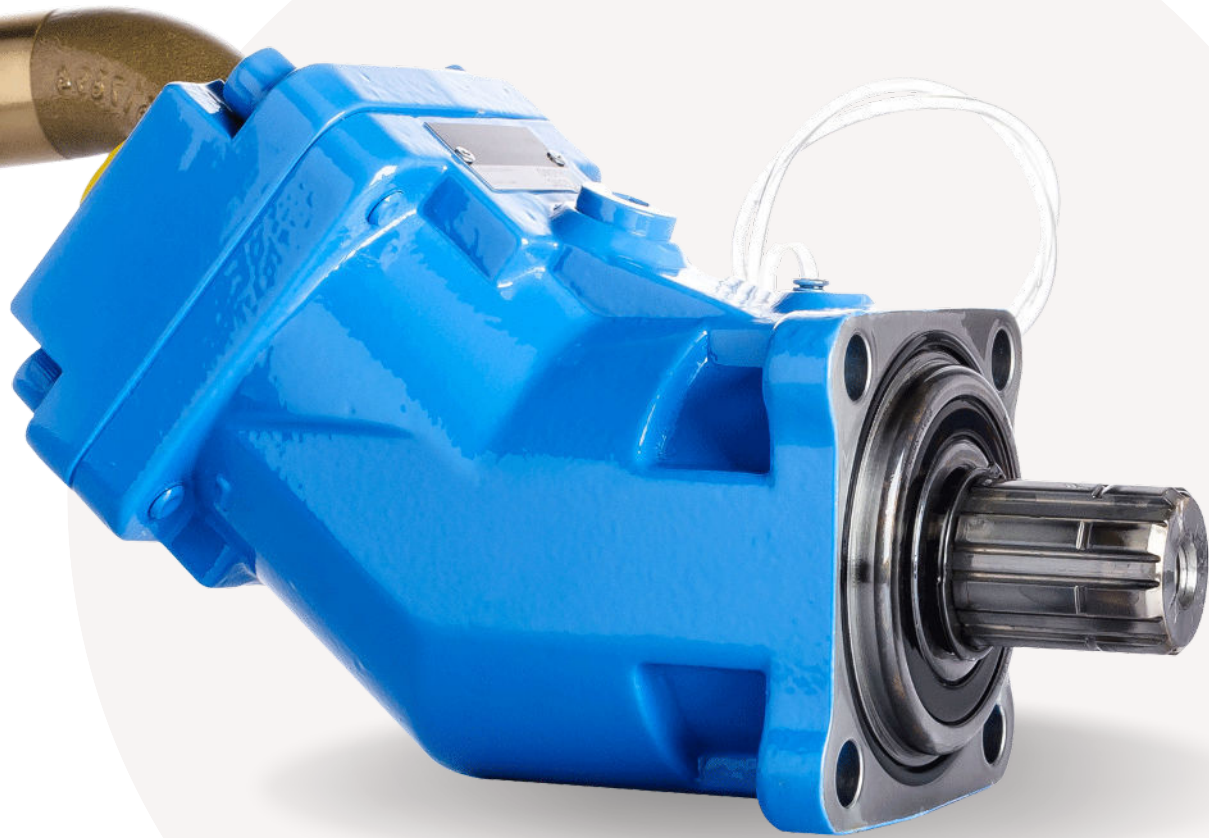

Technical data

Pump reference	Displac. (cc/rev)	Maximum continuous pressure (bar)	Maximum intermittent peak pressure < 5 seconds (bar)	Max speed ⁽¹⁾ (rpm)	Max. torque absorbed at 380 bar ⁽²⁾ (N.m)	Weight		Overhang torque	
						without inlet fitting (kg)	with inlet fitting 2" (kg)	without inlet fitting (N.m)	with inlet fitting 2" (N.m)
XPi 12	12	380	420	3150	76	9.2	9.65	8.74	9.17
XPi 18	18	380	420	2900	114	9.25	9.7	8.79	9.21
XPi 25	25	380	420	2750	159	9.3	9.75	8.84	9.26
XPi 32	32	380	420	2700	204	11.1	11.55	11.1	11.55
XPi 41	41	380	420	2550	261	11.15	11.6	11.15	11.6
XPi 50	50.3	380	420	2450	318	11.2	11.65	11.76	12.23
XPi 63	63	380	420	2300	401	11.25	11.7	11.81	12.28
XPi 80	80.4	380	420	2150	509	14.85	15.3	17.82	18.36
XPi 108	108.3	380	420	1900	687	14.95	15.4	17.94	18.48
XPi 130	129.8	380	420	1750	827	15.35	15.8	18.73	19.28

(1) At absolute pressure 1 bar, ISO VG46 fluid at 25°C.
(2) Maximum torque given with a mechanical efficiency at 95%.



Product webpage
➤ Open



Product catalogue
➤ Open