

XRT SERIES

Fixed displacement pumps


The XRT6868 pump combines dual-flow capability with high efficiency and compact design, enabling reliable performance for complex hydraulic systems.



Technical data

Pump reference	Direction of rotation	Displacement	Max. continuous pressure	Max. peak pressure < 5 seconds	Max. speed ⁽¹⁾	Theoretical torque at Max. continuous pressure	Weight		Overhang torque	
		(cc/rev)	(bar)	(bar)	(rpm)	(N.m)	Without inlet fitting	With inlet fitting 2''	Without inlet fitting	With inlet fitting 2''
XRT6868-P003380	Right (CW)	68 + 68	380	420	1400	823	18,7	19,3	23,8	24,6


(1) At absolute pressure 1 bar, ISO VG46 fluid at 25°C.

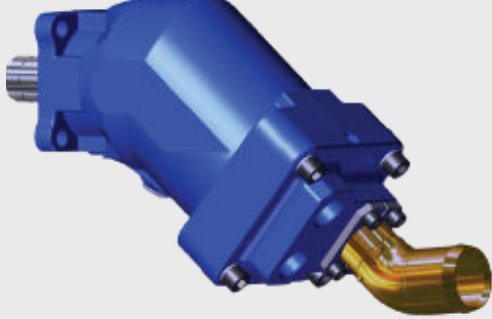

XRT6868

Watch the 3D animation video

**HYDRO LEDUC - Animation video of our new XRT6868**
HYDRO LEDUC

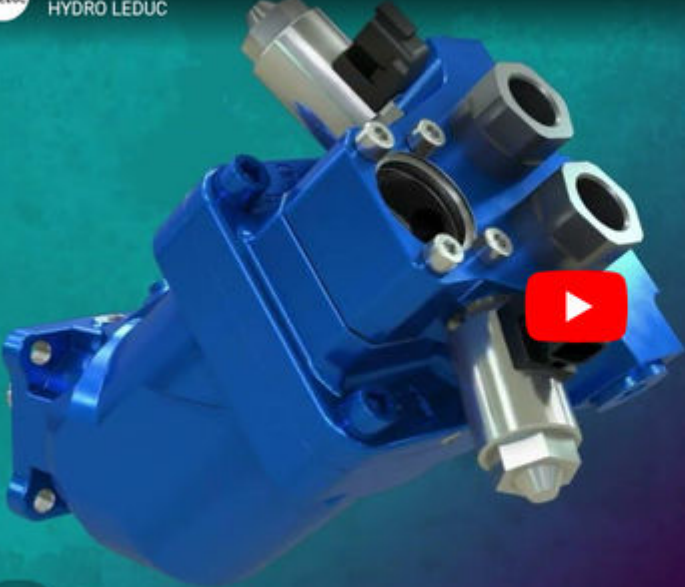

XRT 6868
NEW INNOVATIVE TWIN FLOW
BENT AXIS PUMP

Watch on  **HYDRO LEDUC**



Product catalogue
➤ Open



Product webpage
➤ Open