





► Performance curves of the GEP7.3:



Version 24 Vdc at 300A

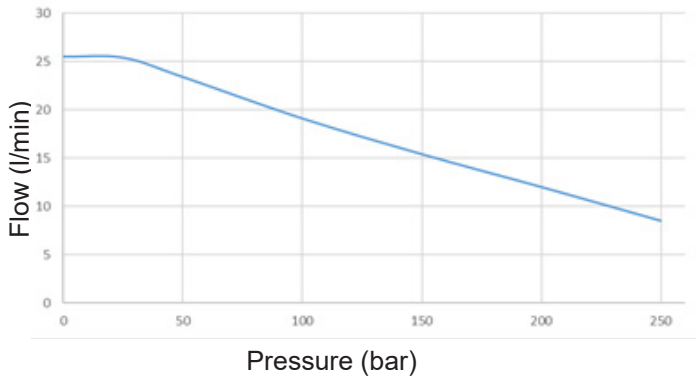

Version 48 Vdc at 200A

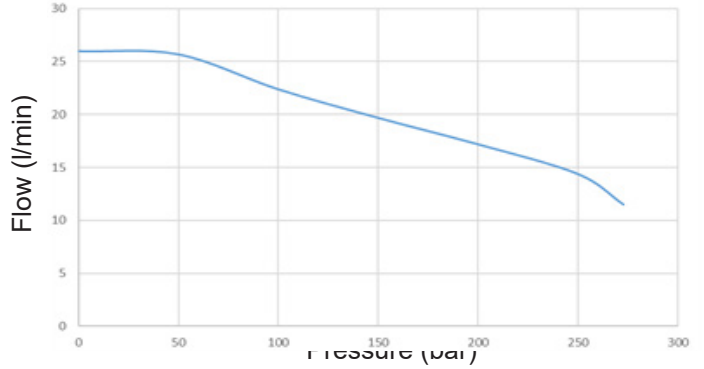


► Wiring connections

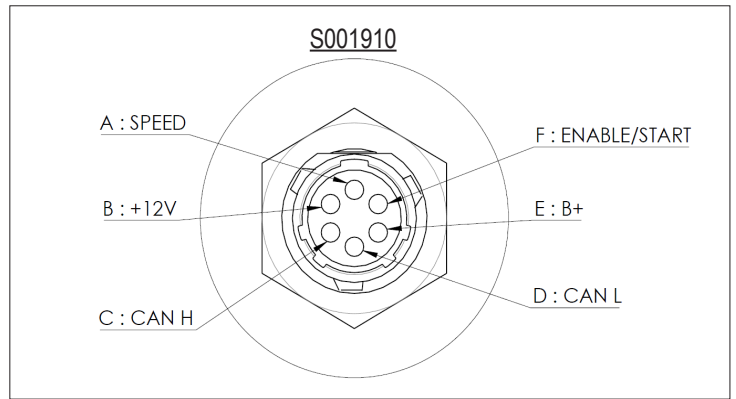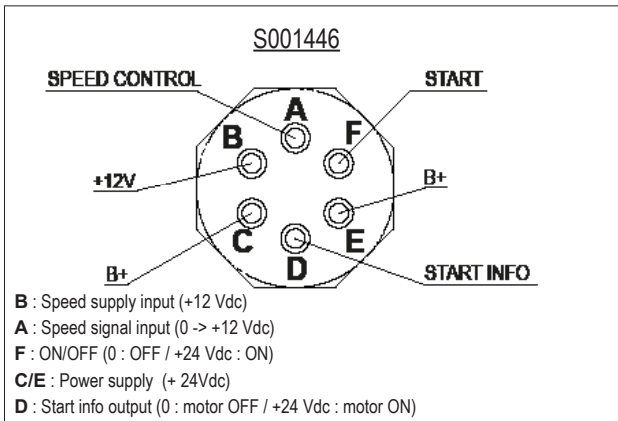

► Electro-hydraulic schematic :

**Maximum pressure on inlet port : 5 bar peak**  
**Minimum pressure on inlet port : >0 bar to 2 bar**

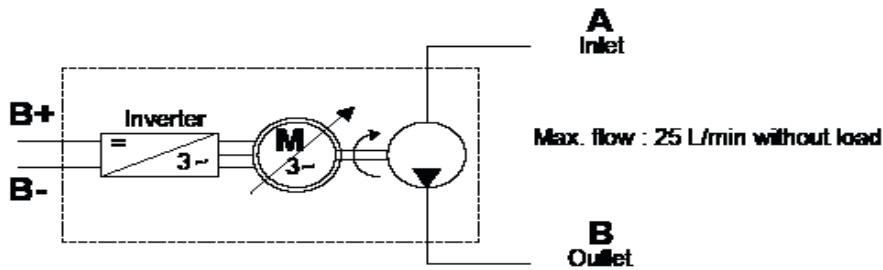

**B+ / B- = Electrical power supply.**

► Standard settings :

- Power supply 24 Vdc or 48 Vdc
- Input current 300 Amps

► Customized settings

- Maximum current settings
- Inverter configuration
- Other settings on request.

For further information, please contact Customer Service (+33(0)3 83 76 77 40).

HYDRO LEDUC SAS  
 Siège social & Usine  
 Head Office and Factory  
 BP 8  
 F-64122 AZERAILLES  
 FRANCE  
 Tel. +33 (0)3 83 76 77 40  
 Fax +33 (0)3 83 76 21 68

HYDRO LEDUC GmbH  
 Am Ziegelplatz 20  
 D-77746 SCHUTTERWALD  
 DEUTSCHLAND  
 Tel. +49 (0) 781-9482590  
 Fax + 49 (0) 781-9482592

HYDRO LEDUC AB  
 Betongvägen 11  
 461 38 TROLLHÄTTAN  
 SWEDEN  
 Tel. + 46 (0) 520 10 820

HYDRO LEDUC BV  
 Ericssonstraat 2  
 5121 ML RIJEN  
 The Netherlands  
 Tel. +31 6 202 40 651

 [www.hydroleduc.com](http://www.hydroleduc.com)

HYDRO LEDUC N.A. Inc.  
 Grand Parkway Industrial Park  
 23549 Clay Road  
 KATY, TX 77493  
 USA  
 Tel. +1 281 679 9654